

CURB ALERT™ Mini - General Installation Instructions

E-Z Install (approximately 45 minutes)

Step 1- Determine the best mounting location for the sensor unit. With both top mount and bottom mount (under bumper) brackets included, a broad variety of sensor mounting locations are possible to mount to almost any vehicle. Measure the ground clearance of the vehicle's lowest ground clearance point in the front fascia/air dam of the vehicle. If the lowest point is 5 inches, for example, calibration of the Curb Alert unit to detect a 4 inch curb height will be required to provide adequate front end curb protection. If the sensor is mounted under the vehicle, it should be mounted as far back from the front end as possible or in a recessed / protected location to prevent damage on steep incline or declines.




Step 2- Clean the sensor mounting location with a suitable solvent to remove all wax or dirt that would reduce the adhesion of the 3M™ adhesive mounting tape on the mounting bracket. The use of 3M™ adhesion promoter 4298 is strongly recommended for plastic mounting surfaces. Remove the 3M™ release film from the bracket and mount the sensor unit to the pre-determined mounting location. Mount the sensor unit being very careful to aim the unit directly forward and centered on the vehicle.

Step 3- At this point, you can connect all Curb Alert™ Mini components outside the vehicle, connect the control box power leads to the battery using an inline fuse holder on the red power lead, and calibrate the sensor. Start the vehicle, and then shut it off. This allows the control box to be used for approximately 20 minutes during sensor calibration thus making one person sensor calibration convenient. After the sensor is calibrated, proceed with the normal installation.

Step 4- Mount the control box in the vehicle engine compartment in a convenient location cleaning the mounting surface and removing the release film from the 3M™ tape. The firewall is often a convenient location. The red (+), with an inline fuse holder, and black (-) power leads from the control box can be connected directly to the battery, fuse block, or to any circuit that detects alternator voltage. Curb Alert™ Mini must detect continuous alternator voltage (>13.2 V) to activate and will automatically shut off in approximately 20 minutes when it does not detect alternator voltage. Apply a cable tie around the the power leads, buzzer cable, and sensor cable at the control box connections to prevent any tension on these components. Please refer to the Sensor Calibration and User Instructions to complete the installation.

Step 5- Mount the buzzer in a convenient location in the driver or passenger side interior, again cleaning the mounting surface and removing the release film from the 3M™ tape. Route the buzzer cable into the engine compartment through the door and hood openings. Plug the buzzer jack into the control box and set the buzzer volume to high initially. Please refer to the Sensor Calibration and User Instructions to complete the installation.

E-Z Install Pictures

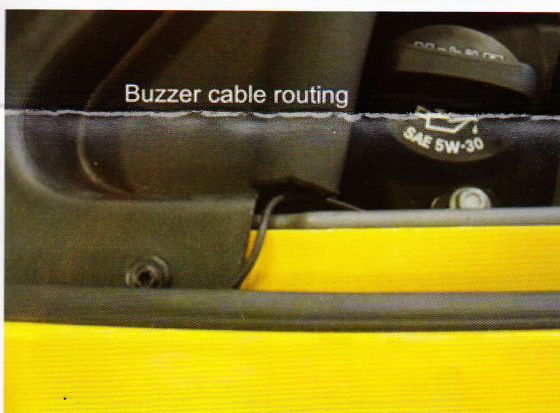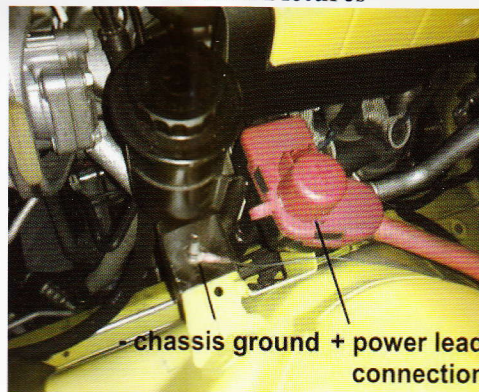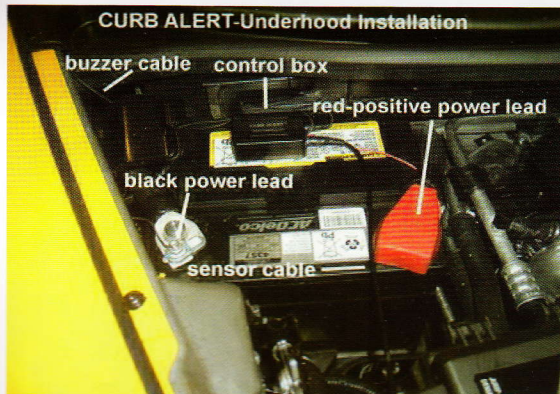

† Please note that CURB ALERT™ Mini acts as a curb stop parking aid, but is not warranted to prevent vehicle damage when parking. CURB ALERT™ Mini aids drivers in safe curb parking, but does not substitute for careful driving practices.

† CURB ALERT™ Mini carries a warranty limited to product replacement for defects in material and workmanship for 12 months when installed using these Installation Instructions. Road hazard and road damage are specifically excluded from the warranty.